

Exploring the Scalability Limits of Communication Networks at the Nanoscale


Ignacio Llatser Martí

llatser@ac.upc.edu

Advisors: [Eduard Alarcón Cot](#) and [Albert Cabellos-Aparicio](#)



Nanonetworks

- Nanotechnology is envisaged to allow the development of nanometer-scale machines
 - Nano-EM
 - Biological

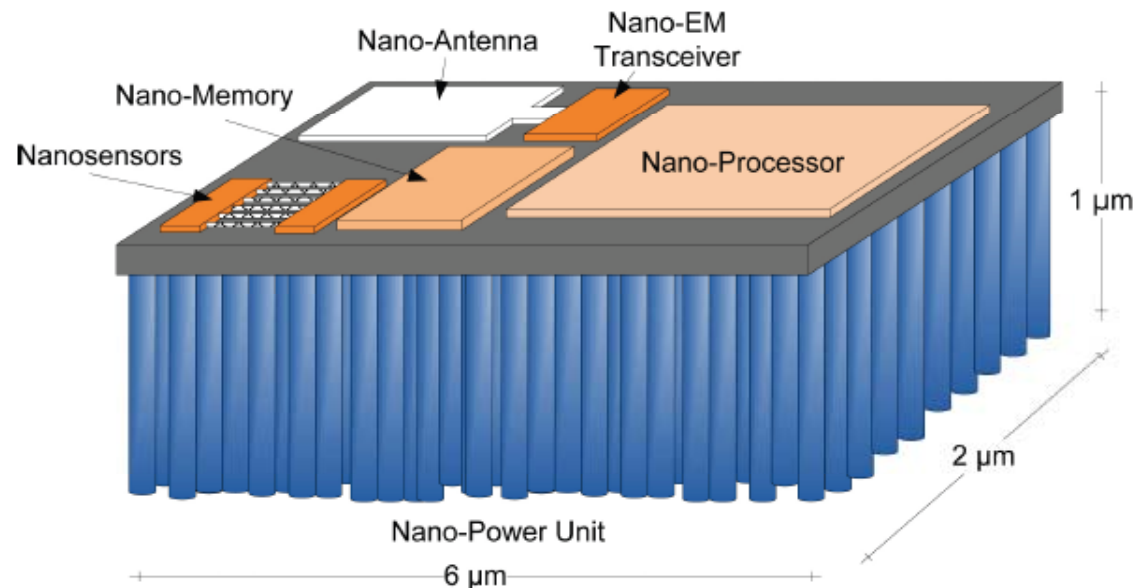

Ian F. Akyildiz, Josep Miquel Jornet, "Electromagnetic Wireless Nanosensor Networks", *Nano Communication Networks (Elsevier)*, 2010.

- Nanotechnology is envisaged to allow the development of nanometer-scale machines
 - Nano-EM
 - **Biological**

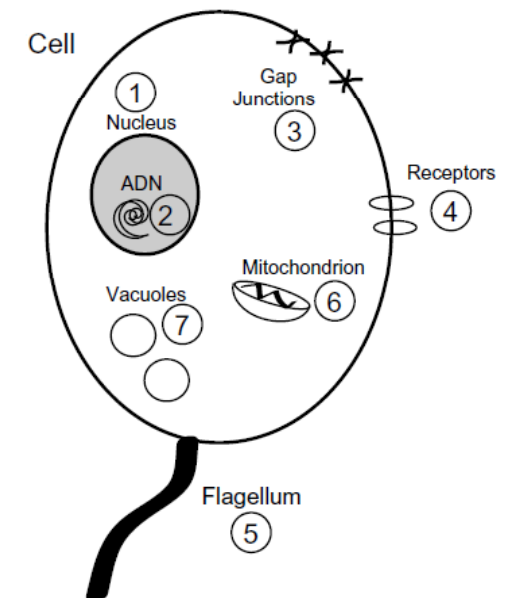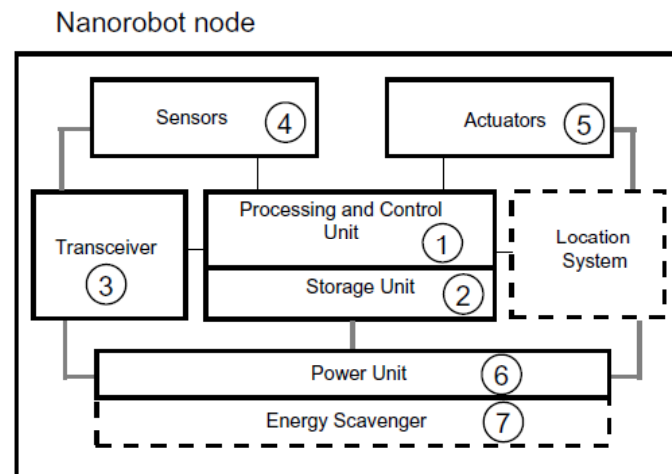


Ian F. Akyildiz, Fernando Brunetti, Cristina Blázquez, “Nanonetworks: A new communication paradigm”, *Computer Networks (Elsevier)*, 2008.

- The capabilities of nanomachines are **constrained** by their limited detection/actuation range.
- **Nanonetworking** is an emerging field studying communication among nanomachines
- The resulting nanonetworks will greatly **expand** the capabilities of a single nanomachine

- Current network protocols and techniques **cannot** be directly applied to communicate nanomachines
- Two main paradigms emerge:
 - **Nano-electromagnetic** communication
 - **Molecular** communication

- **Graphene-based nano-antennas** (CNTs and GNRs) are envisaged to implement nano-EM communications
- Due to the lower wave propagation speed in graphene, graphene-based nano-antennas radiate EM waves in the **THz band**

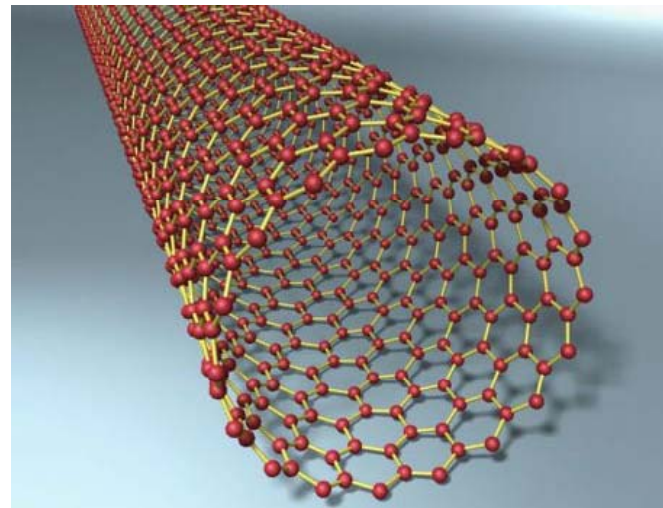

Josep Miquel Jornet, Ian F. Akyildiz, “Graphene-Based Nano-Antennas for Electromagnetic Nanocommunications in the Terahertz Band”, *Proc. European Conference on Antennas and Propagation*, Barcelona, 2010 .

○ Information is encoded inside **molecules**


Ca^{2+}



DNA




- Molecules are sent among nanomachines
 - Brownian motion
 - Spontaneous diffusion

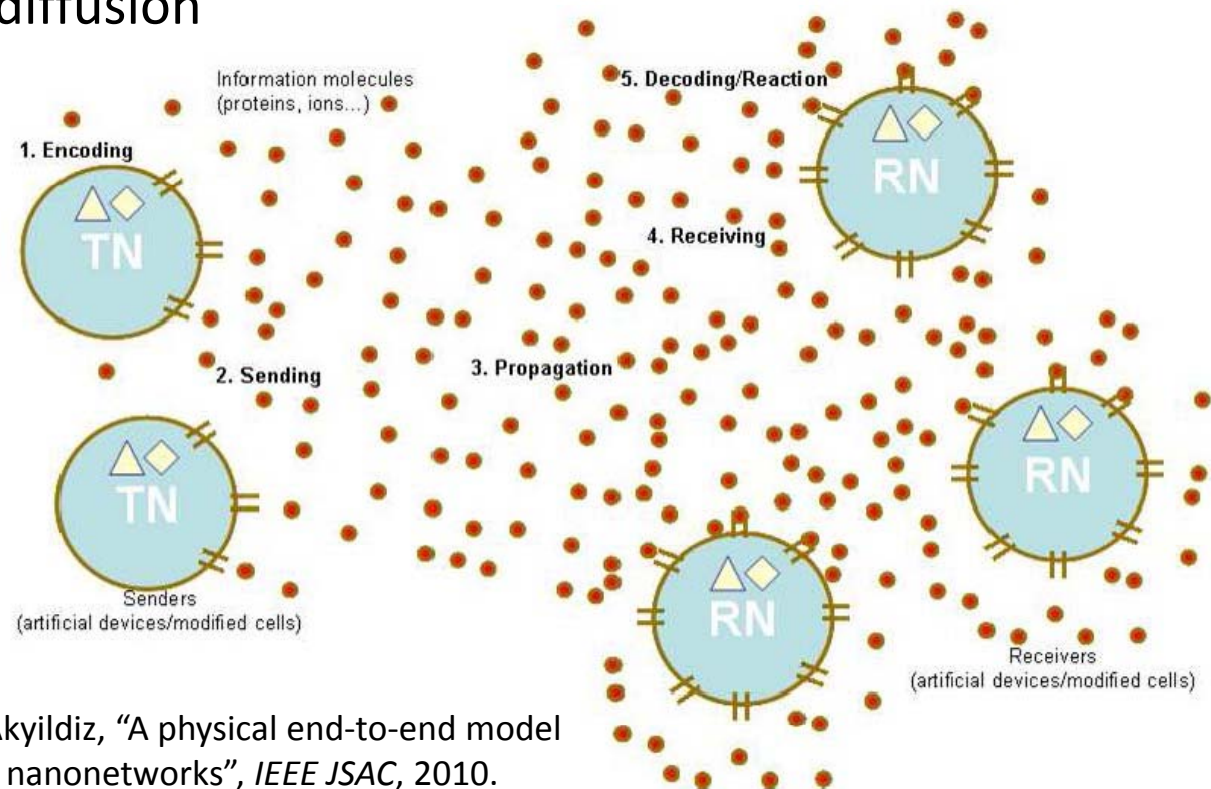

Massimiliano Pierobon, Ian F. Akyildiz, "A physical end-to-end model for molecular communication in nanonetworks", *IEEE JSAC*, 2010.

- Wireless NanoSensor Networks (WNSN)
- Intrabody disease detection and cooperative drug delivery systems

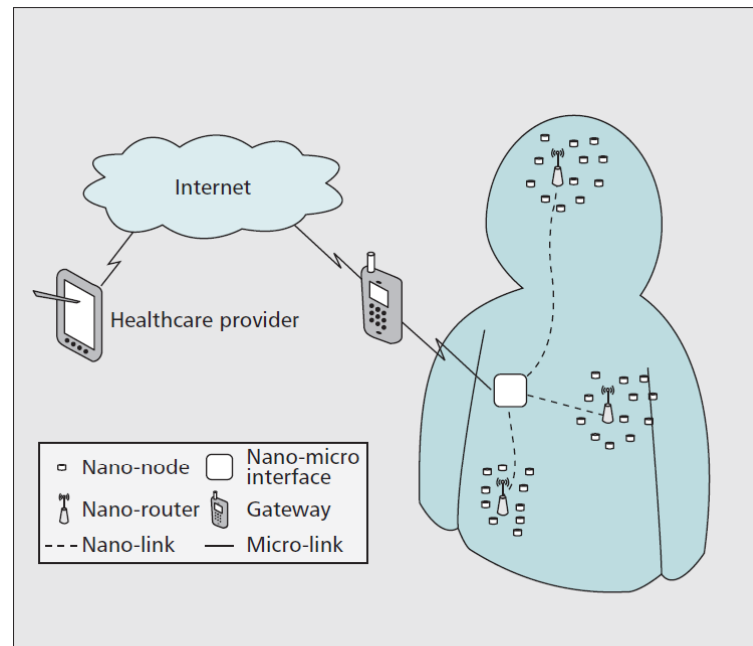

Ian F. Akyildiz, Josep Miquel Jornet, "The Internet of Nano-Things", *IEEE Wireless Communications*, 2010.

- How different will **nanonetworks** be from **traditional electromagnetic networks**?
- We need a **scalability theory** for nanonetworks
 - Study the performance metrics of the network
 - Throughput
 - Transmission delay
 - Energy consumption
 - ...
 - When the network size is reduced to the nanoscale

- Scalability analysis of the **channel capacity** of electromagnetic nanonetworks
- **Characterization** (both analytically and by simulation) of the physical channel of diffusion-based molecular nanonetworks
- Scalability analysis of several **performance metrics** using a pulse-based modulation in the previous scenario

Scalability of the channel capacity of electromagnetic nanonetworks

- Bandwidth ~ THz → very high channel capacity
- Quantum effects in the nano-EM physical channel

- Lower wave propagation speed $v_p = \frac{1}{\sqrt{LC}}$

- Molecular absorption $A_{abs} = \frac{1}{\tau} = e^{kd}$

- Molecular noise $T_{mol} = T_0(1 - \tau) = T_0(1 - e^{-kd})$

- Only appears when signal is transmitted

- How do these quantum effects affect the channel capacity at the nanoscale?
- We particularize Shannon's law for the frequency-selective nano-EM channel

$$C = \max_{S(f): \int_B S(f) df \leq P_T} \int_B \log_2 \left(1 + \frac{S(f)}{A(f)N(f)} \right) df$$

- We obtain analytical expressions of the channel capacity as a function of Δ , d and P_T

$$C_{nq} = \frac{c}{2 \log(2) \Delta} \log \left(1 + \frac{\Delta^3 P_T / d^2}{2\pi^2 c N_0} \right) + \frac{\sqrt{c \Delta P_T / d^2}}{\log(2) \pi \sqrt{2 N_0}} \arctan \frac{\pi \sqrt{2 c N_0}}{\sqrt{\Delta^3 P_T / d^2}}$$

$$C_q = \frac{k_1}{2 \log(2) \sqrt{\Delta}} \log \left(1 + \frac{c^2 \Delta^{3/2} P_T / d^2}{2\pi^2 N_0 k_1^3} \right) + \frac{c \sqrt[4]{\Delta} \sqrt{P_T / d^2}}{\log(2) \pi \sqrt{2 N_0 k_1}} \arctan \frac{\pi \sqrt{2 N_0 k_1^3}}{\sqrt{P_T / d^2} c \Delta^{3/4}}$$

Δ : nanomachine length

d : transmission distance

P_T : transmitted power


N_0 : noise power spectral density

c : speed of light

k_1 : constant


- We find the limits of the previous expressions when $\Delta \rightarrow 0$, $d \rightarrow 0$ and $P_T \rightarrow 0$
- We derive the necessary conditions to keep the network feasible
 - The transmission distance needs to scale proportionally to the nanomachine length: $d = \Theta(\Delta)$
 - The scalability of the transmitted power P_T depends on whether quantum effects are present

- Scalability of the transmitted power P_T as a function of the nanomachine size Δ

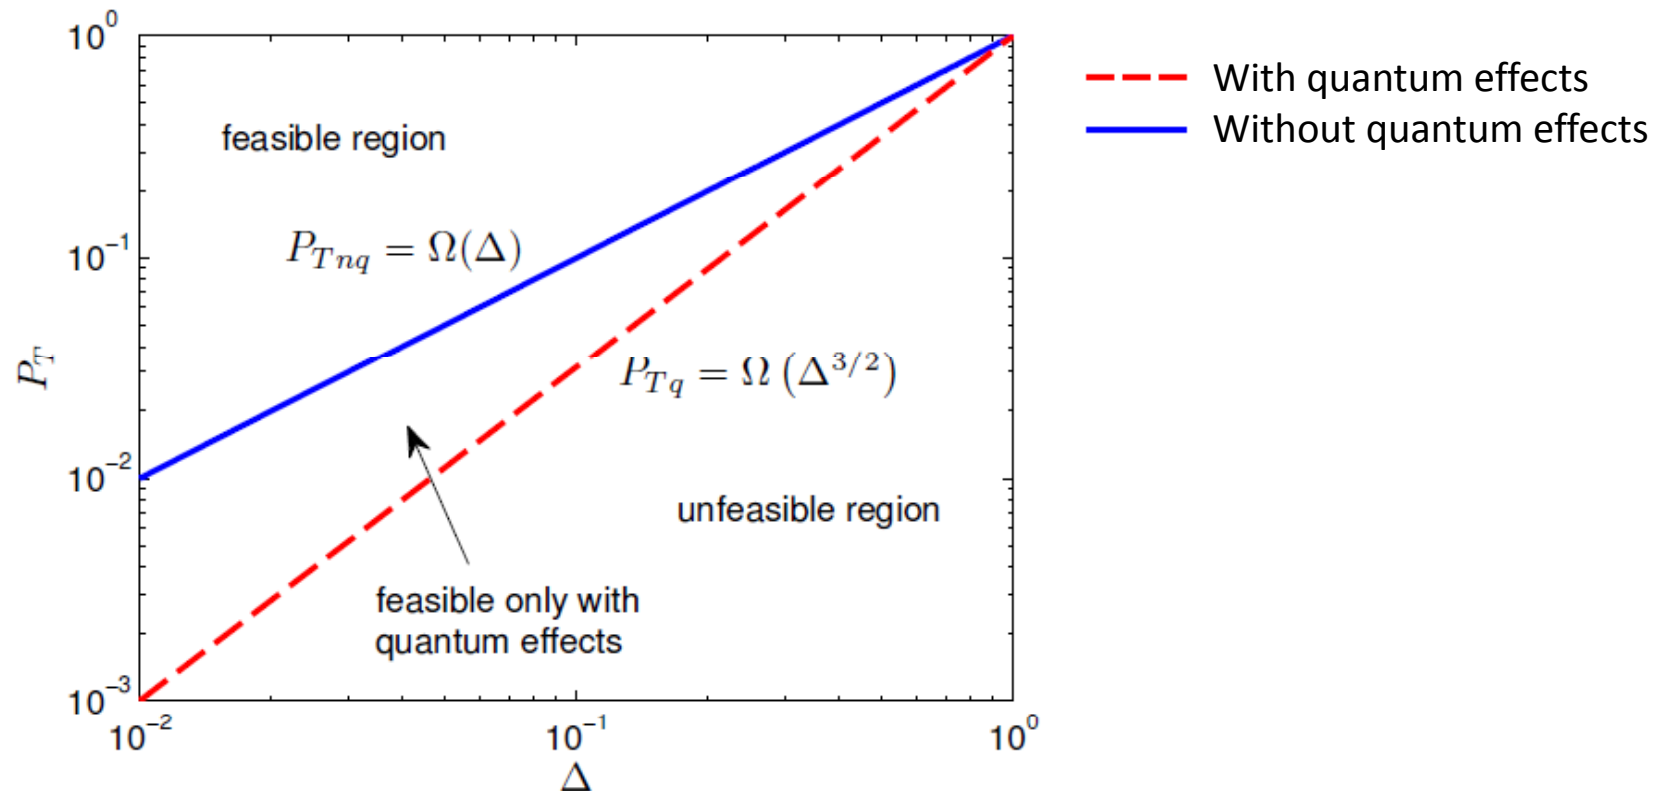

Diffusion-based channel characterization in molecular nanonetworks


- Transmitters encode information into the release pattern of molecules
- Emitted molecules move according to Brownian motion
 - Fick's laws of diffusion
- Receivers measure the local concentration of molecules and decode the information

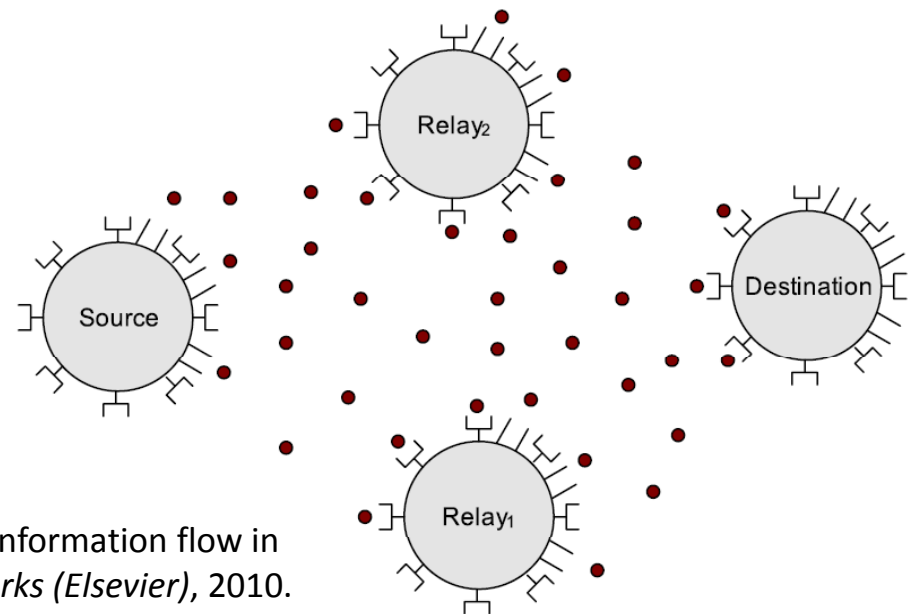

Baris Atakan, Ozgur B. Akan, "Deterministic capacity of information flow in molecular nanonetworks", *Nano Communication Networks (Elsevier)*, 2010.

- The diffusion-based molecular channel is very different from the traditional EM channel
 - Bandwidth \sim kHz \rightarrow low channel capacity
 - Long propagation delay
 - Very energy efficient
 - New sources of noise
 - Brownian motion
 - Molecules are discrete
- We need to characterize this channel in order to study the scalability of diffusion-based molecular communication

- We propose a pulse-based modulation scheme

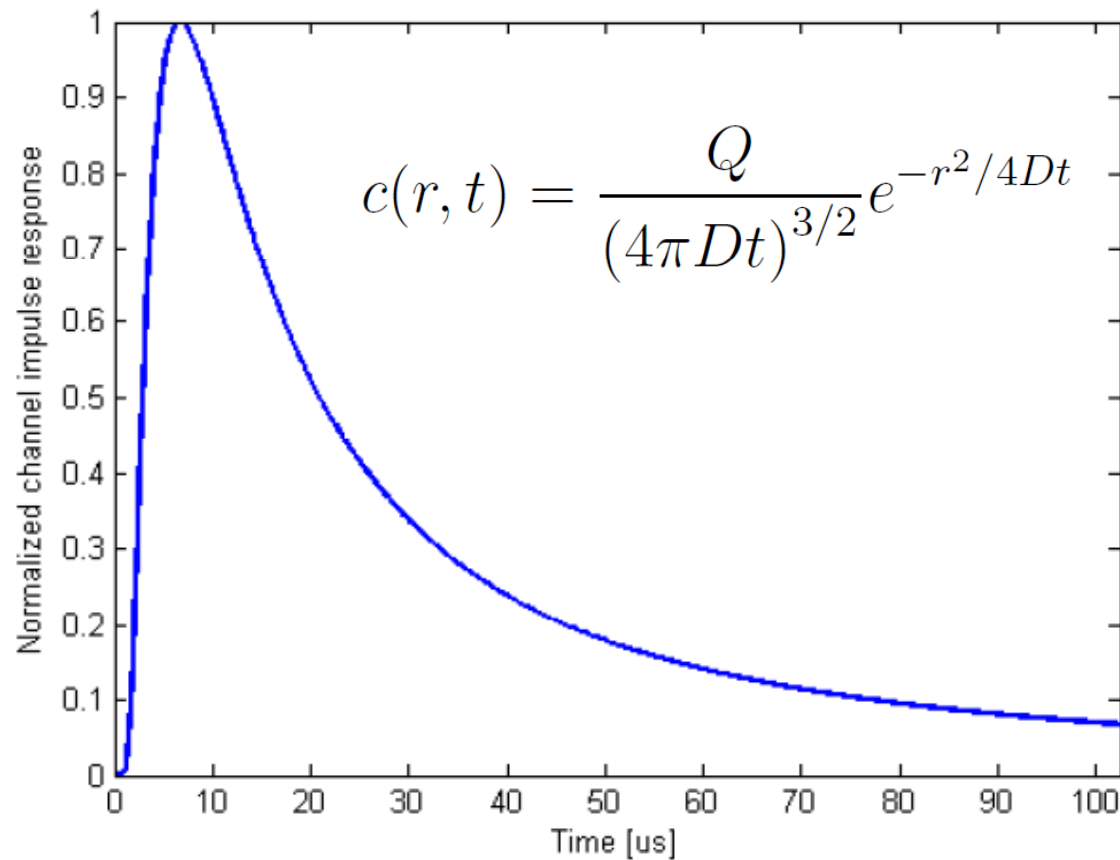

Q : number of emitted molecules
 D : diffusion coefficient
 r : transmission distance
 t : time

- We find analytical expressions for the most relevant metrics from the communication standpoint

- Pulse delay $t_d = \frac{r^2}{6D}$

- Pulse amplitude $c_{max} = \left(\frac{3}{2\pi e}\right)^{3/2} \frac{Q}{r^3}$


- Pulse width $t_w = \frac{0.4501}{D} r^2$

Q: number of emitted molecules


D: diffusion coefficient

r: transmission distance


● The results are validated by simulation

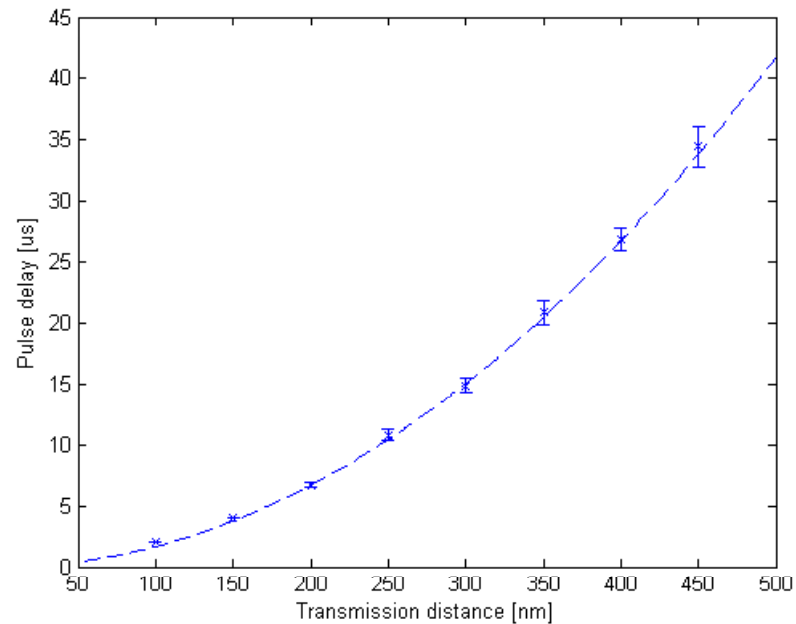

Pulse delay

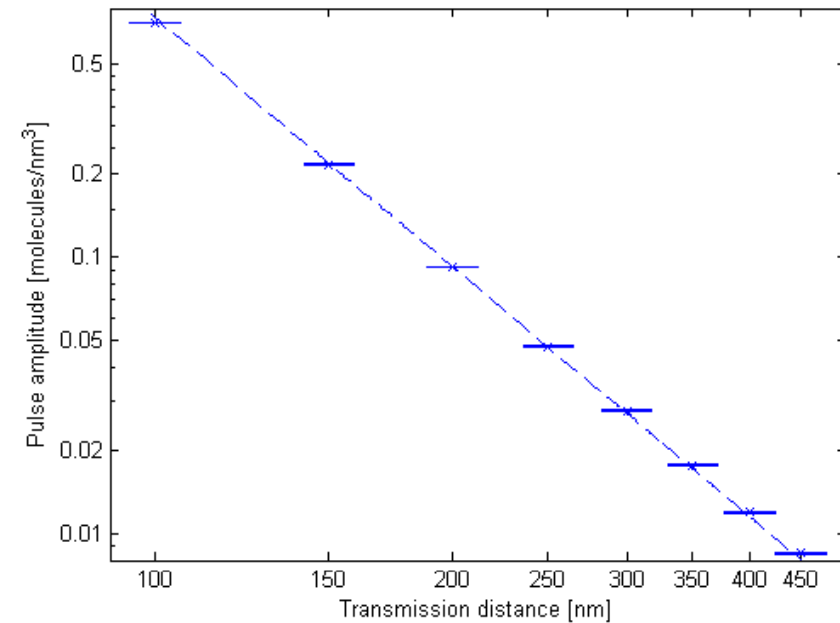

Pulse amplitude

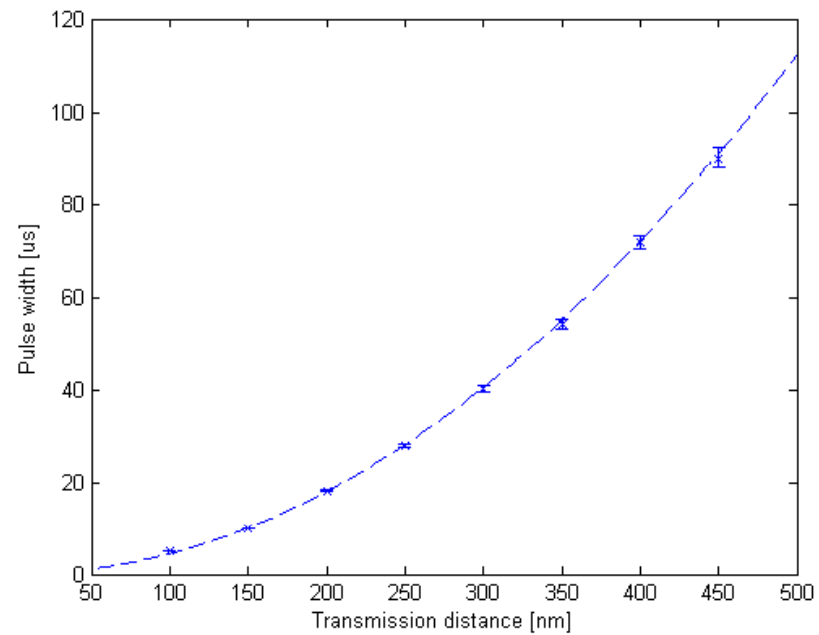

Pulse width

- Scalability of the performance metrics of the diffusion-based molecular channel compared to the wireless EM channel

Metric	EM channel	Molecular channel
Pulse delay	$\Theta(r)$	$\Theta(r^2)$
Pulse amplitude	$\Theta(1/r^2)$	$\Theta(1/r^3)$
Pulse width	$\Theta(1)$	$\Theta(r^2)$

Conclusions and outcomes

- Nanonetworks will greatly expand the range of applications of nanotechnology
- We lay the foundations of a scalability theory for nanonetworks
 - The use of graphene-based antennas gives electromagnetic nanonetworks a scalability advantage over traditional networks
 - The studied metrics in molecular nanonetworks scale worse than in wireless electromagnetic networks

4 papers

- I. Llatser, A. Cabellos-Aparicio, E. Alarcón, J. M. Jornet, I. F. Akyildiz, “Scalability of the Channel Capacity of Electromagnetic Nanonetworks”, to be submitted to *IEEE Transactions on Wireless Communications*.
- I. Llatser, E. Alarcón, M. Pierobon, “Diffusion-based Channel Characterization in Molecular Nanonetworks”, submitted to *IEEE MoNaCom 2011*.
- I. Llatser, I. Pascual, N. Garralda, A. Cabellos-Aparicio, M. Pierobon, E. Alarcón, J. Solé-Pareta. “NanoSim: A Simulation Framework for Diffusion-based Molecular Communication”, to be submitted to *IEEE GLOBECOM 2011*.
- N. Garralda, I. Llatser, A. Cabellos-Aparicio, M. Pierobon “Simulation-based Evaluation of the Diffusion-based Physical Channel in Molecular Nanonetworks”, submitted to *IEEE MoNaCom 2011*.

2 co-supervised master thesis

- Nora Garralda, “Simulation-based Evaluation of the Diffusion-based Physical Channel in Molecular Nanonetworks”.
- Iñaki Pascual, “NanoSim: Simulation Tool for Diffusion-based Molecular Communication in Nanonetworks”.

Exploring the Scalability Limits of Communication Networks at the Nanoscale

Ignacio Llatser Martí

llatser@ac.upc.edu

Advisors: [Eduard Alarcón Cot](#) and [Albert Cabellos-Aparicio](#)